

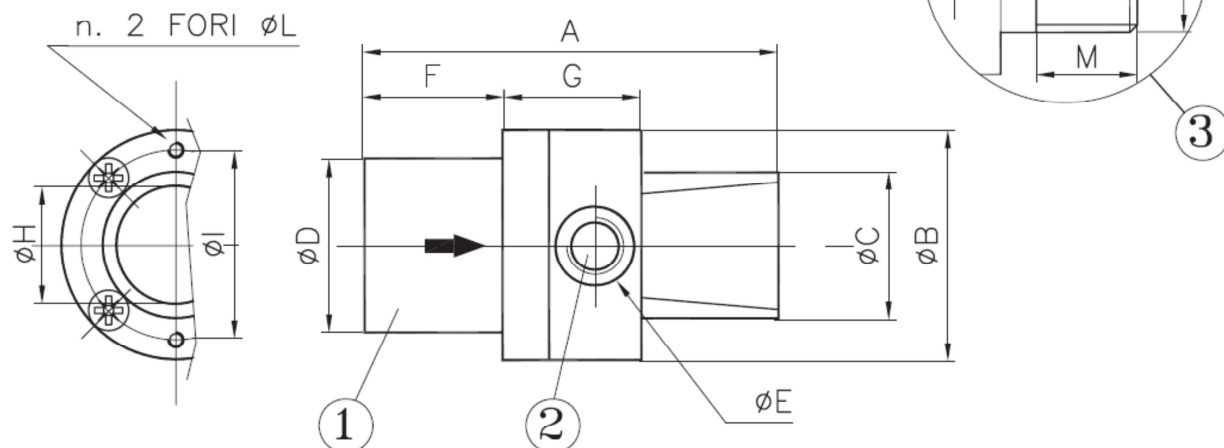


- 1 - Presa aspirazione
2 - Alimentazione aria compressa
3 - Booster filettato 1/2" (Opzionale)

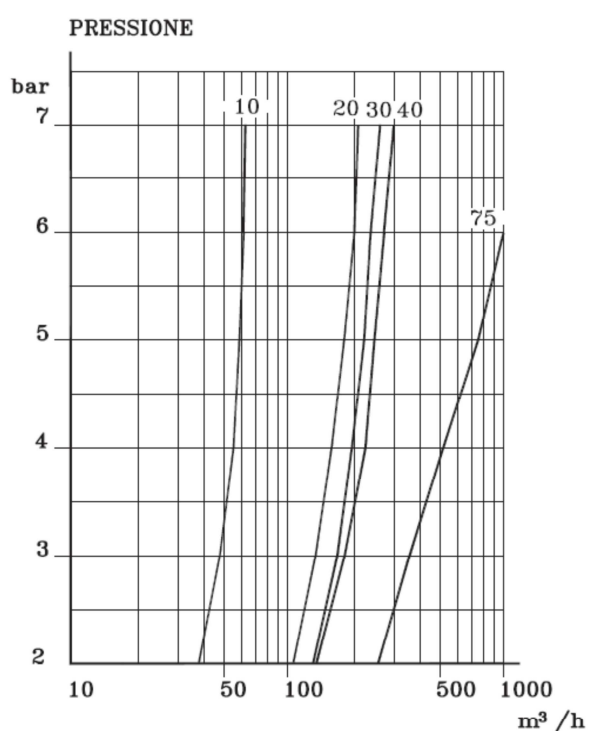

tipo BBP ...		10	10 1/2"	20	30	40	75
ASPIRATORE							
Aria aspirata (5 bar) Nm³ /h		45,4		125,0	159,0	202,6	500
Depressione max mm/H₂O		-1200		-200...-800			
SOFFIATORE							
Aria soffiata (5 bar) Nm³ /h		55,9		186,0	220,0	250,5	800
Pressione lavoro mm/H₂O		0...900		0...600			
Pressione max mm/H₂O		1000		800			
Consumo d'aria (5 bar) Nl/s		2,35		4,80	5,8	9,2	14,6
Pressione d'aliment. Bar		2...6					
Temperatura lavoro °C		-20... +80					
Rendimento (aspir/consum) K=		7,0		10,8	10,3	7,6	9,1
Materiale		Alluminio-nitrile					
Peso g.		70	80	180	300	525	3000
CODICE:		ALPHA BBP10	ALPHA BBP10 1/2	ALPHA BBP 20	ALPHA BBP 30	ALPHA BBP 40	ALPHA BBP 75
Dimensioni	mm	A 70		90	93	96	180
		B 37		50	70	84	140
		C 19	1/2"	32	42	52	100
		D 19	1/2"	38	56	75	125
	gas	E 1/8"		1/4"	3/8"	3/8"	1/2"
		F 23		30	30	35	35
		G 21		30	34	35	65
		H 10		20	30	40	75
		I 29		41,5	60	72	126
		L M4		M4	M4	M4	M6
		M		19			
ACCESSORI:							

DIAGRAMMA DELLA PORTATA

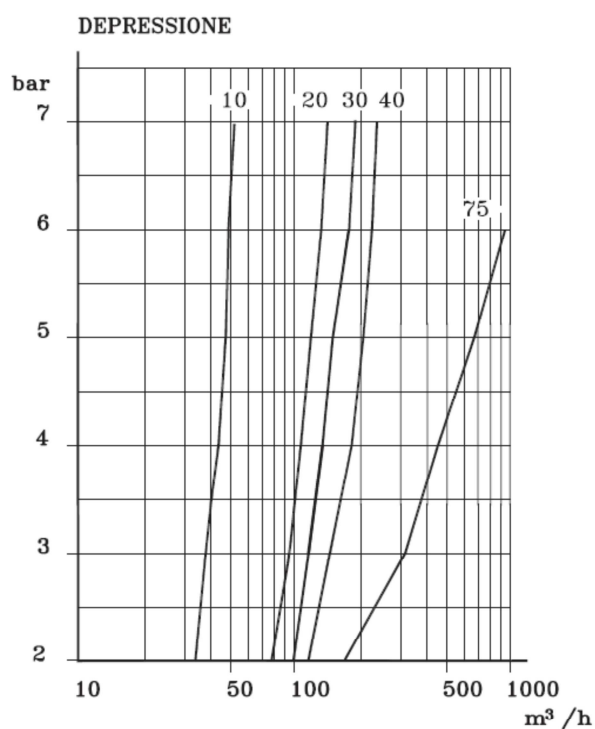

CARATTERISTICHE DI DEPRESSIONE-PRESSIONE

