



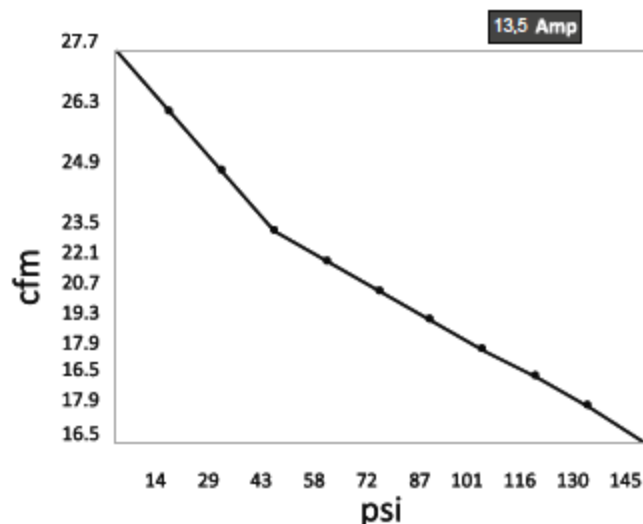

Serbatoio trattato internamente / Tank Coated Inside

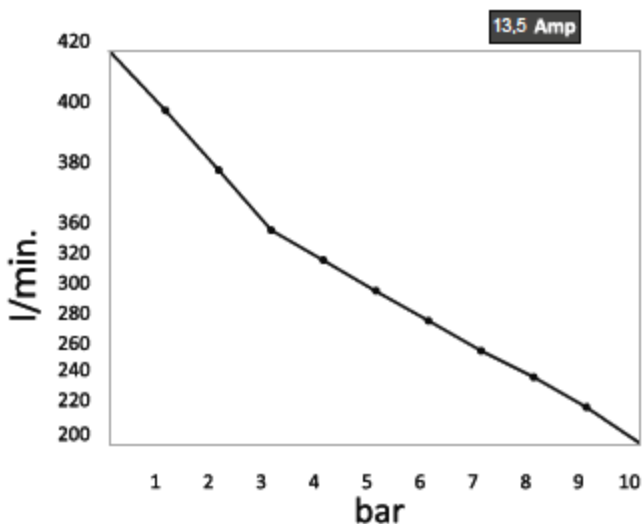

Modello	Potenza		Tensione	Giri	Serbatoio		Cilindri	Pressione max		Aria aspirata		Aria resa (5 bar)		Rumore	Misure	Peso	
Model	Power		Voltage	RPM	Tank		Cylinders	Max pressure		F.A.D.		Air delivery (5 bar)		Noise	Dimensions	Weight	
	Kw	Hp	V/Hz/Va	rpm	Lt	Gal	n°	Bar	Psi	L/min	C.F.M.	L/min	C.F.M.	dB (A)	(LxHxW) cm	Kg	Lbs
ESK480/100	3,1	4,0	380/50	1400	90	23,78	4	10	145	480	16,95	300	10,59	74	120x70x40	85	187,4
Trifase - Three-phase															100% DUTY CYCLE		