




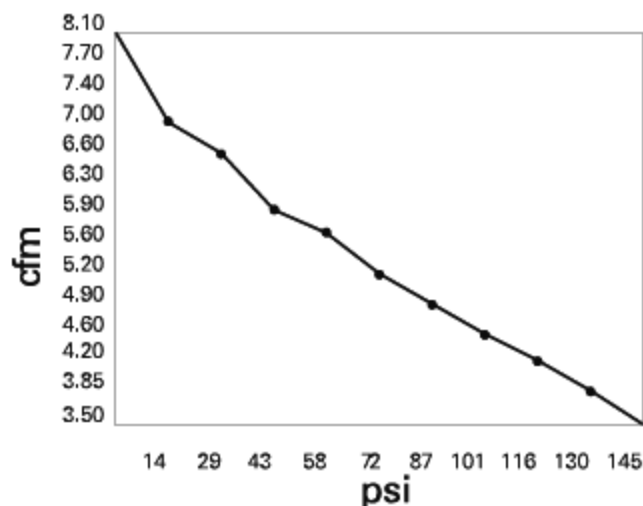

Serbatoio trattato internamente / Tank Coated Inside

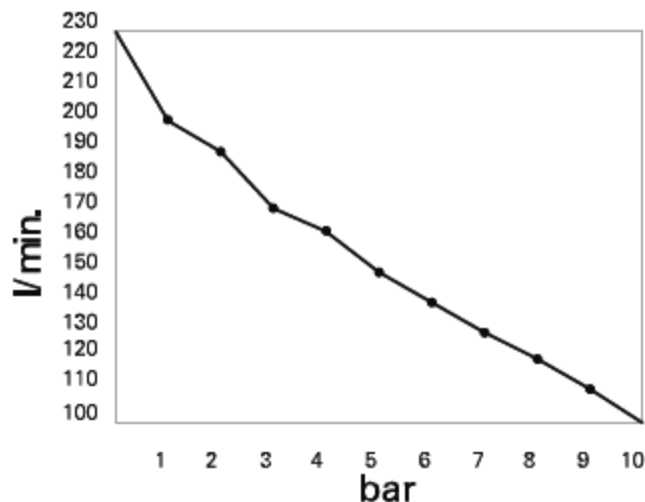

AXER[®]



Modello	Potenza		Tensione	Giri	Serbatoio		Cilindri	Pressione max		Aria aspirata		Aria resa (5 bar)		Rumore	Misure	Peso	
Model	Power		Voltage	RPM	Tank		Cylinders	Max pressure		F.A.D.		Air delivery (5 bar)		Noise	Dimen-sions	Weight	
	Kw	Hp	V/Hz/Va	rpm	Lt	Gal	n°	Bar	Psi	L/min	C.F.M.	L/min	C.F.M.	dB (A)	(LxHxW) cm	Kg	Lbs
CSK240/50	1,7	2,4	230/50	1400	50	13,21	2	10	145	240	8,48	150	5,3	67	48x102x55	43	94,8

Su richiesta sono disponibili diversi voltaggi - Different voltage available on request 110v/60Hz - 110v/50Hz - 230v/60Hz

100% DUTY CYCLE